

# MARSTEK

Power Anywhere & Anytime

MARSTEK JUPITER C+

## Balcony All-in-one ESS

800W On-grid, Plug & Play, 2400W 4 MPPT PV Input  
2.56kWh LFP Battery, Cycle Life  $\geq 6000$

Extra Battery Module (EBM)  
2.56kWh LFP Battery, Cycle Life  $\geq 6000$

Stackable Design  
Expand to 3 EBMs, up to 10.24kWh

Anti Feed-in, 100% Self Consumption  
With MARSTEK / Shelly Smart Meter

HD Touchable Screen  
IP65 Waterproof  
LFP Cells with 6000+ Cycles, 10 Years Warranty, 15 Years Lifespan

Support Integration with External EMS  
Open API/Modbus Protocol  
RS485/WIFI/BT



### Marstek Energy Co., Limited

Add: BLDG#A, Changfang Industrial Park, No.2 Guihua 5th Road, Pingshan District, Shenzhen, Guangdong, China

Tel: 86-755-28398778


Email: [market@marstekenergy.com](mailto:market@marstekenergy.com)

Web: [www.marstekenergy.com](http://www.marstekenergy.com)




Product Manual

# SPECIFICATIONS

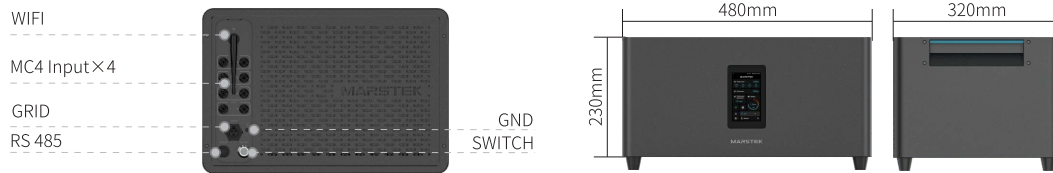

Model	MARSTEK JUPITER C+
<b>Energy Storage Unit (Stack)</b>	
Capacity	2.56kWh
Life Cycle	>6000(25°C)
Battery Type	LiFePO <sub>4</sub>
Current	50Ah
Number of Energy Storage Unit	3PCS (max)
Total Capacity of The Product	2.56~10.24kWh
<b>PV Input</b>	
Maximum Input Power	2400W
Operating Voltage Range	16~60V
Maximum Input Short Circuit Current(Single Channel)	20A
MPPT Track Number	4
MPPT Efficiency	99.80%
<b>AC Output</b>	
Rated Output Power	800VA
Working Phase	L/N/PE
Rated Grid Voltage	230V
Rated Grid Frequency	50Hz
Rated Grid Output Current	3.48A
Power Factor	> 0.99(default), 0.8lagging...0.8leading(adjustable)
THDi	<3%
<b>Efficiency</b>	
Battery Side - AC Side Maximum Efficiency	>96.5%
<b>Basic Parameters</b>	
Ambient Temperature Range	-20 ~ + 60°C (Storage-30 ~ + 85°C)
Relative Humidity	0-95%
IP Level	IP65
Cooling Method	Natural Cooling
Maximum Altitude	2000m
Net Weight / Gross Weight	28.45kg / 31kg
<b>General</b>	
Grid connection	BC01
Photovoltaic connection	MC4
Display	Touchable HD Screen
Communication	Bluetooth, WIFI & RS-485(Waterproof Aviation Plug)
On-grid Connection Standard	VDE 4105/0124, NF EN50549-1, CE I0-21, PETREE, PN-EN 50549-1/-2, PEA 1165-2020
Regulatory/EMC	IEC/EN 62109-1/-2, IEC/EN 61000-6-1/-2/-3/-4, IEC/EN 61000-3-2/-3, EN 300 328, EN 301 489 -1/-17, EN 50665, EN 62920, CB 62619, EN 50549-1

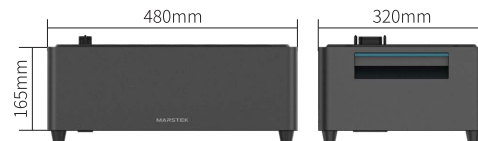

Model	MST-E2.5ST
<b>Battery Parameter</b>	
Capacity	2.56kWh
Life Cycle	>6000(25°C)
Battery Type	LiFePO <sub>4</sub>
Current	50Ah
<b>Basic Parameters</b>	
Ambient Temperature Range	-20 ~ + 60°C (Storage-30 ~ + 85°C)
Relative Humidity	≤95%
IP Level	IP65
Cooling Method	Natural Cooling
Maximum Altitude	2000m
Net Weight / Gross Weight	22.5kg / 24kg